


innovate... laminate

Introducing the new Easymount™ range with heated top roller for superb results everytime



Reverse
Feature

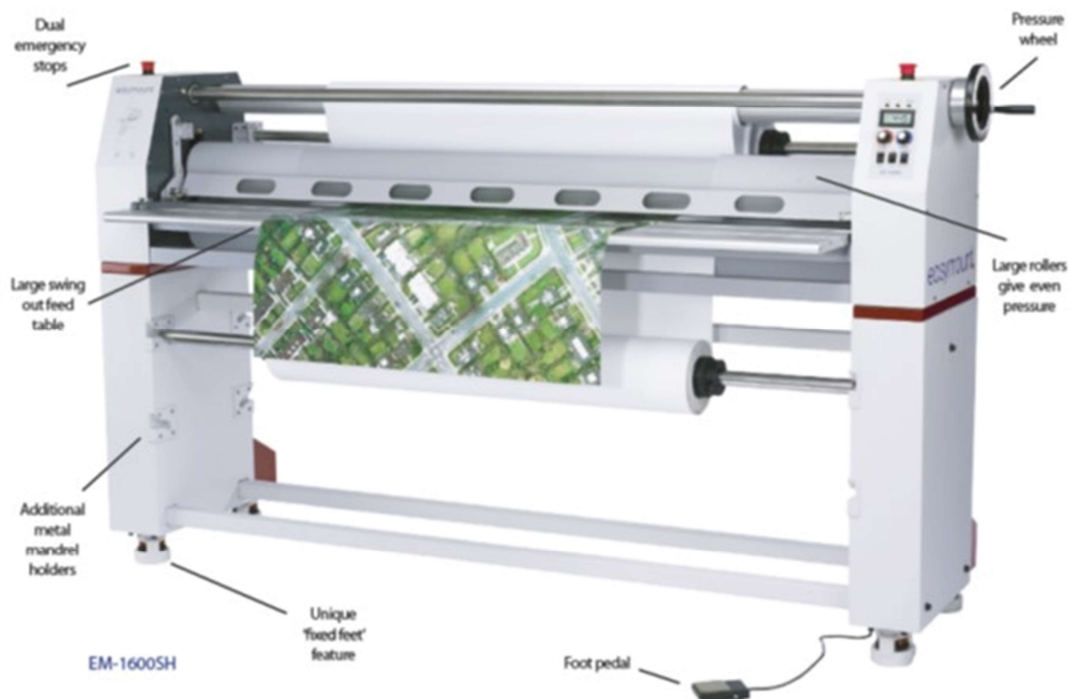

Speed
Control



Temperature
Control



Design

The new Easymount™ combines style with functionality. The design has been enhanced and more features have been added. This professional range sets new standards of excellence.

Performance

The three models in the range include 1200, 1400 and 1600mm widths, all of which are capable of producing up to 3 metres per minute - 50% faster than before!

Enhancements

The range now features additional mandrel holders for storing spare rolls of film, a swing out feed tray for hassle free loading and a pressure gauge on the rollers to give perfect results every time.

IDEALLY SUITED FOR

- cold laminates
- mounting prints to boards
- applying vinyls
- application tapes
- applying adhesive films

and many more...

GREAT FOR USE IN

- commercial printers
- copy and print shops
- exhibition graphics
- reprographics bureau
- sign makers

EASYMOUNT™ SH

EM-1400SH / EM-1600SH

FEATURES

- hot & cold mounting and laminating
- solid construction heavy-duty system
- mount & laminate simultaneously
- single hot adjustable roller
- take up mandrel for release liner paper
- variable speed control
- large silicon rollers for even pressure
- reverse mechanism and foot pedal
- low maintenance
- magic eye safety feature



ROLLER PRESSURE GAUGE



USER FRIENDLY CONTROL PANEL



LARGE SWING OUT FEED TRAY



MOTORISED TAKE UP UNIT*

NEW IMPROVED FEATURES

- 50% faster - now up to 3m per minute
- extra mandrels to hold spare rolls of film which saves time when changing rolls
- adjustable castors for levelling on an uneven floor
- bigger feed tray to assist prints feeds
- swing out feed tray and safety guard making mounting onto board and loading the film quicker and hassle free
- pressure gauge on rollers, adjustable on machine to give perfect pressure every time

* This is an optional extra



EM-1600SH

specifications	EM-1400SH	EM-1600SH
approx laminating speed (m/min)	3	3
maximum width (mm)	1400 (55")	1600 (62")
mounting thickness (mm)	25	25
roller diameter (mm)	120	130
warm-up time (mins)	10	10
hot roller heater system	internal infrared	internal infrared
laminating temperature (°C)	0-60	0-60
speed/temp control	dial keypad	dial keypad
pressure adjustment	manual (with guide)	manual (with guide)
film core (mm)	75	75
power supply AC (V-Hz)	220/240-50-60	220/240-50-60
power consumption (W)	1310	1500
dimensions (mm)	1990 x 648 x 1248	2190 x 648 x 1257
weight (Kg)	189	217
warranty (year)	1	1