

• SKY 480 R6 · SKY 490 R6



SKY 480 R6

• Option : White Color



SKY 490 R6




○ Specifications

MODEL	SKY 480 R6	SKY 490 R6
Max. Laminating Width	480 mm(18.9")	490 mm(19.3")
Max. Laminating Speed	1,150 mm / min	1,150 mm / min
Max. Pouth Thickness	350 MIC (14 MIL)	350 MIC (14 MIL)
Max. Laminating Thickness	3 mm	3 mm
Heating System	Heating roller internal heater	Heating roller internal heater
Q'ty of Roller	6	6
Carrier	Free	Free
Temperature Control	Yes	Yes
Speed Control	Yes	Yes
Reverse Switch	Yes	Yes
Preheating Time	5 min.	5 min.
Power Supply	AC 100, 110, 120, 220, 230, 240V (50/60Hz)	AC 100, 110, 120, 220, 230, 240V (50/60Hz)
Power Consumption	1,200 watts	1,200 watts
Dimension	651 × 271 × 130mm	651 × 271 × 130mm
Weight	22 kgs	22 kgs
Operation Temperature	0-140 °C	0-140 °C


6 Rollers System Laminators (A2+)



Heat-treatment gears (800°C or more)

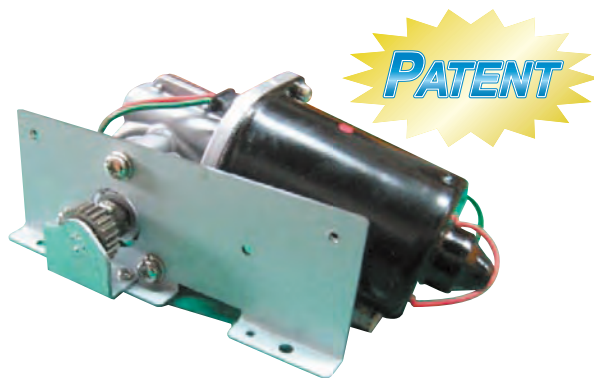

Special Protection Bar

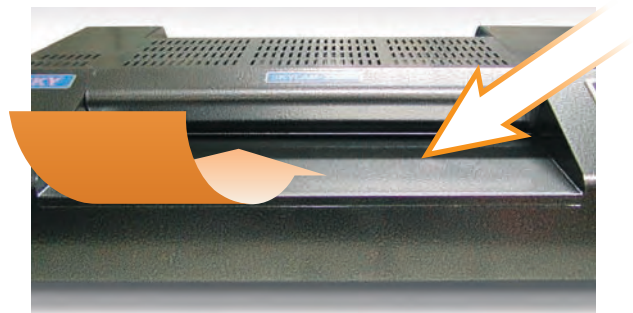

Any problem for wrong action of pouch feeding with the opened side can be protected by this special guide bar

Patent Cooling System

The top metal cases of SKY 490R6/480R6 shall be always "cool" during a long time of laminations at high temperatures by our patent cooling system.

Auto Power Off

If user will not touch any button on the LCD control unit for 2 hours continuously, SKY 490 R6/480 R6 shall be automatically cooled down and powered off.

LCD Display



SKY 490 R6



SKY 480 R6

Actual Working Time Check Function

Shipping Information

MODEL	PALLET	20FT
SKY 330 ARP	60	600
SKY 330 PD	64	640
SKY 330 P	64	640
SKY 330 LCD	78	780